# LogiLink®

Computer & Network Accessories

# LogiLink®

Computer & Network Accessories

LogiLink convinces with a large portfolio of computer and network products and is the result of the combination of key technologies, continuous innovation, award-winning designs and an excellent price-performance ratio.

The brand

LogiLink was registered as a trade mark in 1988 and is protected by copyright in 37 countries. 2direct has taken over the name in 2006 for own use with a new concept and product portfolio.

The concept

The LogiLink range consists of a carefully selected portfolio of top products of computer and network technology. The product range is constantly expanded and kept up to date. More product groups are scheduled.

The packaging

The complex LogiLink retail packaging is easy to recognize and supports in combination with the attractive design your sales success. The product descriptions and short instructions are multilingual.

Our Promise

With Logilink we will always offer attractive high quality products at competitive prices. The offered products are innovative and reflect the current state of the art. Customer satisfaction is our highest goal.

Our Support

With specially developed sales strategies we give you the ability of combining different articles of the LogiLink product range fitting into your markets and your target customers. Ask us for a personal offer.

Our Service

A good support belongs to a complete concept. We support you and your customers with drivers, the solution of technical problems via Internet or our technical hotline. Our support does not end after sales.

# Table of content

## Network Products


- WLAN IEEE802.11g 54MBit — Seite 4 – 6
- WLAN IEEE802.11n 300MBit — Seite 6 – 8
- IP Cameras — Seite 9 – 10
- Powerline Homeplugs — Seite 10
- Printserver — Seite 11 – 12
- Fast Ethernet & Gigabit Switches — Seite 13 – 15
- Fast Ethernet & Gigabit Adapter — Seite 16 – 17
- Patch- und Installation cables — Seite 18
- Tools & Cable tester — Seite 19 – 20


## HDMI Products


- Switche, Splitter, Extender & Cables — Seite 21 – 22


## USB Products


- USB Cardreader — Seite 23
- USB Hubs & Multimedia Panel — Seite 24
- Bluetooth Adapter & Headset — Seite 26
- USB Adapter — Seite 27 – 30
- Notebook Accessories — Seite 30 – 32
- VoIP Phones — Seite 32
- Input devices — Seite 33
- Webcams — Seite 34
- Headsets and Accessories — Seite 35 – 36


## External Enclosures


- 2,5“ HDD Enclosure — Seite 37
- 3,5“ HDD & 5,25“ CD-DVDEnclosure — Seite 38
- PC case fans & Converter — Seite 39


## Multi I/O Cards


- PCI Cards — Seite 40 – 44
- PCI Express Cards — Seite 44 - 46
- PC Cards (Cardbus) — Seite 46
- Express Cards — Seite 47

## Wireless LAN 54MBit USB 2.0 Adapter

WLAN 54MBit USB 2.0 Adapter
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Connector: USB 2.0 (comp. to USB 1.1)
Chipset: Realtek
Plug & Play
EAN: 4260113562055

**Part.no. WL0006**

## Wireless LAN 54MBit USB 2.0 Turbo Adapter

WLAN 54MBit USB 2.0 Adapter
Removable swivel Rod antenna
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
WEP, WPA, WPA2, WPA-PSK (1+2)
Transmission frequency: 2400-2483,5 MHz
Connector: USB 2.0 (comp. to USB 1.1)
Chipset: Ralink
Plug & Play
EAN: 4260113563748

**Part.no. WL0025**

## Wireless LAN 54MBit PCI Card

WLAN 54MBit PCI Card
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
WEP, WPA, WPA2, WPA-PSK (1+2)
Removable swivel Rod antenna
Transmission frequency: 2400-2483,5 MHz
Chipset: Realtek
Plug & Play
EAN: 4260113561614

**Part.no. WL0002**

## Wireless LAN 54MBit PCI Card

WLAN 54MBit PCI Card
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Realtek
Plug & Play
EAN: 4260113565926

**Part.no. WL0039**

**WLAN 11g 54MBit**

## Wireless LAN 54MBit PC Card

WLAN 54MBit PC Card
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2.0, 1.0 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Realtek
Plug & Play
EAN: 4260113561621

**Part.no. WL0003**

## Wireless LAN 54MBit Access Point

WLAN 54MBit Access Point
IEEE 802.11b and IEEE 802.11g
WLAN: 54,22,11, 5.5, 2.0, 1.0 Mbps
Removable swivel Rod antenna
Connector: 1x RJ45 (LAN)
Transmission frequency: 2400-2483,5 MHz
Link Activity, Collision, Speed
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Supports: WDS and Bridge mode
DHCP server, MAC access control
EAN: 4260113563809

**Part.no. WL0027**

## Wireless LAN 54MBit Broadband Router

WLAN Broadband Router with 4-Port Switch
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2, 1 Mbps
Removable swivel Rod antenna
Connectors: 1xRJ45 WAN, 4xRJ45 LAN
Transmission frequency: 2400-2483,5 MHz
Chipset: Realtek / german firmware!
WEP, WPA, WPA2, WPA-PSK (1 + 2)
PPOE, PPTP, DHCP, MAC, WDS
Integrated firewall
EAN: 4260113563793

**Part.no. WL0026**

## Wireless LAN 54MBit Broadband Router

WLAN Broadband Router with 4-Port Switch
IEEE 802.11b and IEEE 802.11g
WLAN: 54, 22, 11, 5.5, 2, 1 Mbps
Removable swivel Rod antenna
Connectors: 1xRJ45 WAN, 4xRJ45 LAN
Transmission frequency: 2400-2483,5 MHz
Chipset: Realtek
WEP, WPA, WPA2, WPA-PSK (1 + 2)
PPOE, PPTP, DHCP, MAC, WDS
Integrated firewall
EAN: 4260113565728

**Part.no. WL0038**

## WLAN Booster

Amplifier for the WLAN signal
Switchable levels 100mW, 200mW and 500mW
Supports wireless standards 802.11b/g
Input: 1x SMA connector
Output: 1x SMA connector
According to the current rules in Germany, the transmission performance of a wireless device should not exceed 100mW . The operation of WLAN amplifier in Germany is possible, but the user is responsible for the compliance with the transmission power limits.

Part.no. WL0033

## WLAN Indoor Omni-directional Antenna, 2.4 GHz

Antenna to enhance the WLAN signal
Radiation: Omni-directional
Frequency: 2.4 GHz-2.5 GHz
Connector: SMA Connector
Impedance: 50 Ohm nominal
VSWR: 1.92 max.
Power consumption: 1 Watt
Compatible to IEEE 802.11 a/b/g/n

Part.no. WL0037 / 5dbi
Part.no. WL0036 / 7dbi
Part.no. WL0035 / 9dbi

# Wireless LAN IEEE 802.11n Draft 2.0

### Standard:

The first draft of the standard IEEE 802.11n was adopted in 2006, January 20th. The certification of the Wireless-N-Draft 2.0 was the first half of 2007. All LogiLink products meet the 802.11n Draft 2.0 standard.

### Technology:

802.11n is based on MIMO (Multiple Input Multiple Output). MIMO uses more send and receiving antennas. In comparison with “older” WLAN technologies the additional change of frequencies allows either higher data rates in the same distance or greater distances with the same data rates. There is also a lower power consumption specified regarding mobile applications.

### Avantages:

802.11n is based on MIMO (Multiple Input Multiple Output). MIMO uses more send and receiving antennas. In comparison with “older” WLAN technologies the additional change of frequencies allows either higher data rates in the same distance or greater distances with the same data rates. There is also a lower power consumption specified regarding mobile applications.

## Wireless LAN 300MBit USB 2.0 Adapter

WLAN 300MBit USB 2.0 Adapter
Supports: USB 2.0 and USB 1.1
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Connector: USB 2.0 (comp. to USB 1.1)
EAN: 4260113564103

**Part.no. WL0030**

2T2R

## Wireless LAN 300MBit PCI Card

WLAN 300MBit PCI card
IEEE 802.11n,802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK 1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Plug & Play
EAN: 4260113564110

**Part.no. WL0031**

2T3R

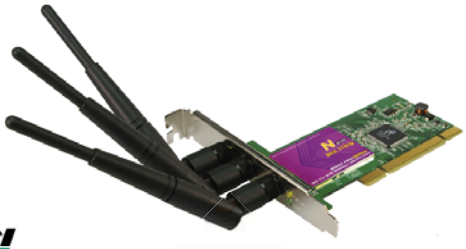

## Wireless LAN 300MBit PCI Express Card

WLAN 300MBit PCI Express card
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Plug & Play
EAN: 4260113566886

**Part.no. WL0044**

2T3R

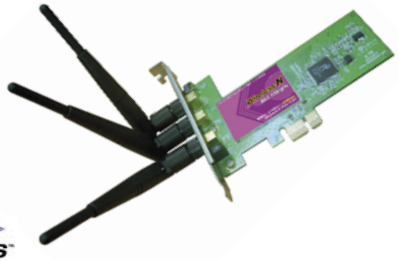

## Wireless LAN 300MBit PC Card

WLAN 300MBit PC Card
PC Card Slot: 32 Bit Version
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Plug & Play
EAN: 4260113564097

**Part.no. WL0029**

2T3R

## Wireless LAN 300MBit Express Card

2T3R

300 WLAN 802.11 N

ExpressCard/34

WLAN 300MBit Express Card
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Plug & Play
EAN: 4260113566879

Part.no. WL0043

## Wireless LAN 300MBit USB 2.0 Adapter

1T2R

300 WLAN 802.11 N

2.0 USB

WLAN 300MBit USB 2.0 Adapter
Supports: USB 2.0 and USB 1.1
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Connector: USB 2.0 (comp. to USB 1.1)
EAN: 4260113566299

Part.no. WL0040

## Wireless LAN 300MBit PCI Card

1T2R

300 WLAN 802.11 N

PCI

WLAN 300MBit PCI Card
Connector: PCI 2.1 or 2.2
IEEE 802.11n, 802.11g, 802.11b
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5, 2, 1 Mbps
WEP, WPA, WPA2, WPA-PSK (1 + 2)
Transmission frequency: 2400-2483,5 MHz
Chipset: Ralink
Plug & Play
EAN: 4260113566305

Part.no. WL0042

## Wireless LAN 300MBit Broadband Router

2T3R

300 WLAN 802.11 N

WLAN Broadband Router with 4-Port Switch
IEEE 802.11n, 802.11g, 802.11b, 802.3u
According to 802.11n Draft 2.0 specification
WLAN: 300, 54, 22, 11, 5.5, 2, 1 Mbps
Connectors: 1xRJ45 WAN, 4xRJ45 LAN
Transmission frequency: 2400-2483,5 MHz
Supports: advanced MIMO technology
WEP, WPA, WPA2, WPA-PSK (1 + 2)
PPPoE, PPTP, DHCP, MAC
Chipset: Ralink + Realtek
EAN: 4260113564080

Part.no. WL0028

## Fast Ethernet IP Camera, 640x480

Video access over Internet and LAN
Lens: Manual Focus, F=1.8
LAN operation: 10/100 MBit, 1x UTP
Chipset: Realtek RTL8650B + Topro
2 MB Flash and 16 MB SD RAM
Sensor: Micron MI-360, CMOS
Access via browser with Active-X
Color control, exposure, white balance
Max. resolution: 640x480
Framerate: 30 Fps
EAN: 4260113563663

**Part.no. WC0001**

## Wireless LAN IP Camera, 640x480

Video access over Internet and LAN
WLAN operation: 802.11g 54 MBit
LAN operation: 10/100 MBit, 1x UTP
Chipset: Realtek + Topro
2 MB Flash and 16 MB SD RAM
Sensor: Micron MI-360 CMOS
Access with Active-X Support
Color control, exposure, white balance
Max. resolution: 640x480
Framerate: 30 Fps
EAN: 4260113563670

**Part.no. WC0002**

54 WLAN 802.11 G

## Fast Ethernet Pan & Tilt IP Kamera

Video access over Internet and LAN
Lens: Manual Focus, F=1.8
LAN operation: 10/100 MBit, 1x UTP
Chipset: Realtek RTL8650B + Topro
2 MB Flash and 16 MB SD RAM
Sensor: Micron MI-360, CMOS
Access via browser with Active-X
Color control, exposure, white balance
Max. resolution: 640x480
Framerate: 30 Fps
EAN: 4260113563663

**Part.no. WC0003**

**Pan & Tilt**

## Wireless LAN Pan & Tilt IP Kamera

Video access over Internet and LAN
WLAN operation: 802.11g 54 MBit
LAN operation: 10/100 MBit, 1x UTP
Chipset: Realtek + Topro
2 MB Flash and 16 MB SD RAM
Sensor: Micron MI-360 CMOS
Access with Active-X Support
Color control, exposure, white balance
Max. resolution: 640x480
Framerate: 30 Fps
EAN: 4260113563670

**Part.no. WC0004**

**Pan & Tilt**

54 WLAN 802.11 G

### Fast Ethernet IP Camera with Night View

Video access over Internet and LAN
Sensor: CMOS
Connector: 10/100 MBit, 1x UTP
Audio: Built-in microphone
Resolution: 640x480, 320x240, 160x120
Framerate: Max. 12fps(VGA), 25fps(CIF)
Built-in Night Vision IR LED
Video: M-JPEG, Audio: ADPCM
8kbps LED for operation and LAN connection
Wall mount included
EAN: 4260113566848

Part.no. WC0005

# Power Line - a new network dimension

Networks are now an integral part of our everyday life and flexibility is more important than ever. A wired network installation is often not possible, particularly in residential buildings, and the wireless LAN installation requires technical know-how.

The Powerline technology gets the network easily and conveniently into the house. The technology that turns electricity network in a fully-fledged network, in which your PC gets involved over a LogiLink ® Adapter at the nearest outlet. So you can access the internet, other PCs and printers from all power sockets in your house. You can take the adapter with you if you are working in another room or with another PC.

### Powerline Ethernet Adapter, 85MBit, Duo-Set

LAN connection over power network
Connection power network: 220 Volt, 50Hz
Connection Computer: 1x RJ45 LAN each
Max. data transfer rate: 85 Mbps
Suitable for internet access or LAN
No cable installation, no drilling
Max. distance: 150 meter
Transmission through rooms and floors
Secure 56 bit encryption
EAN: 4260113565094

Part.no. PL0001

### Powerline Ethernet Adapter, 200 MBit, Duo-Set

LAN connection over power network
Connection power network: 220 Volt, 50Hz
Connection Computer: je 1x RJ45 LAN
Max. data transfer rate: 200 Mbps
Suitable for internet access or LAN
No cable installation, no drilling
Max. distance: 150 Meter
Transmission through rooms and floors
Secure 56 bit encryption
EAN: 4260113565100

Part.no. PL0002

## Printserver, 1x Parallel

Printserver Parallel
Connection LAN: 10/100 MBit, RJ45
Printer: Centronics 36-Pin Plug
Standard according IEEE1284
Supports: Auto-MDI/MDI-X
Chipset: Risc
512 kb Flash and 2 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113563618

**Part.no. PS0001 / LAN**
**Part.no. PS0003 / WLAN**

## Printserver, 1x USB 2.0

Printserver USB 2.0
Connection LAN: 10/100 MBit, RJ45
Printer Connector: USB A Jack
Standard USB 2.0 specification
Supports: Auto-MDI/MDI-X
Chipset: Risc
512 kb Flash and 2 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113563625

**Part.no. PS0002 / LAN**
**Part.no. PS0004 / WLAN**

## MFP Server, 1x USB 2.0

Multi function Print server for
Printer, Scanner, Fax, FTP
Connection LAN: 10/100 MBit, RJ45
Connection USB 2.0: USB A Jack
Auto-MDI/MDI-X
Chipset: Risc
1 MB Flash and 8 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113566640

**Part.no. PS0007**

## WLAN MFP Server, 1x USB 2.0

WLAN Multi function Print server for
Printer, Scanner, Fax, FTP
Connection LAN: 10/100 MBit, RJ45
WLAN: 812.11 b/g bis 54 Mbps
Connector: USB A Jack
Auto-MDI/MDI-X
Chipset: Risc
1 MB Flash and 8 MB SD RAM
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113563656

**Part.no. PS0005**

## Printserver, 1x Parallel & 2x USB 2.0

Printserver 1x Parallel & 2x USB 2.0
Connection LAN: 10/100 MBit, RJ45
Connector Parallel: DSUB 25-Pin Jack
Connector USB: 2x USB A Jack
Supports: Auto-MDI/MDI-X
Chipset: Risc
2 MB Flash and 16 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113563681

**Part.no. PS0006**

## WLAN Printserver, 1x Parallel & 2x USB 2.0

WLAN Printserver 1x Parallel & 2x USB 2.0
WLAN: 802.11 b/g up to 54 Mbps
Connection LAN: 10/100 MBit, RJ45
Connector Parallel: DSUB 25-Pin Jack
Connector USB: 2x USB A Jack
Chipset: Risc, Auto-MDI/MDI-X
2 MB Flash and 16 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113566794

**Part.no. PS0008**

## Printserver with NAS Storage Server

Print server for the operation of printer or alternatively NAS Storage Server
Connection LAN: 10/100 MBit, RJ45
Connection USB 2.0: 2x USB A Jack
Windows, FTP, HTTP and Apple File Sharing
Auto-MDI/MDI-X, RISC CPU
4 MB Flash and 32 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW
Apple Talk, NetWare, SNMB, NetBeui
EAN: 4260113566800

**Part.no. PS0009**

## WLAN Printserver with NAS Storage Server

Print server for the operation of printer or alternatively NAS Storage Server
WLAN: 812.11 b/g up to 54 Mbps
Connection LAN: 10/100 MBit, RJ45
Connection USB 2.0: 2x USB A Jack
Windows, FTP, HTTP and Apple File Sharing
Auto-MDI/MDI-X, RISC CPU
4 MB Flash and 32 MB SD RAM
Configuration through integrated menu
Supports: MAC Adressing, LPR, RAW etc.
EAN: 4260113566817

**Part.no. PS0010**

## Fast Ethernet Desktop Switch, 5-Port

Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Speed: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Connectors: 5x RJ45 + 1x Uplink Port
LED indicate operation, activity and collision
Store and Forward architecture
Auto MDI / MDI-X Function
EAN: 4260113563816

**Part.no. NS0001B**

## Fast Ethernet Desktop Switch, 8-Port

Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Speed: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Connectors: 8x RJ45
LED indicate operation, activity and collision
Store and Forward architecture
Auto MDI / MDI-X Function
EAN: 4260113563823

**Part.no. NS0002B**

## Fast Ethernet Desktop Switch, 16-Port

Fast Ethernet Desktop Switch
IEEE 802.3 and IEEE 802.3u
Speed: 10/100 MBit
In Full Duplex Mode up to to 20/200 MBit
Connectors: 16x RJ45
LED indicate operation, activity and collision
Store and Forward architecture
Auto MDI / MDI-X Function
EAN: 4260113561553

**Part.no. NS0024**

## Fast Ethernet 19“ Switch, 16 -Port

Fast Ethernet 19“ Switch
IEEE 802.3 and IEEE 802.3u
Speed: 10/100 MBit
In Full Duplex Mode up to to 20/200 MBit
Connectors: 16x RJ45
LED indicate operation, activity and collision
Store and Forward architecture
Auto MDI / MDI-X, incl. Rackmount brackets
EAN: 4260113565599

**Part.no. NS0029**

## Fast Ethernet 19“ Switch, 24-Port

Fast Ethernet 19“ Switch
IEEE 802.3 and IEEE 802.3u
Speed: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Connectors: 24x RJ45
LED indicate operation, activity and collision
Store and Forward architecture
Auto MDI / MDI-X Function
Including 19“ Rackmount brackets
EAN: 4260113564730

**Part.no. NS0025**

## Gigabit Desktop Switch, 5-Port

Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab Compatible
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Connectors: 5x RJ45
LED indicate operation, activity and collision
Automatic speed detection
Store and Forward architecture
Auto MDI / MDI-X Function
EAN: 4260113565704

**Part.no. NS0030**

## Gigabit Desktop Switch, 8-Port

Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab Compatible
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Connectors: 5x RJ45
LED indicate operation, activity and collision
Automatic speed detection
Store and Forward architecture
Auto MDI / MDI-X Function
EAN: 4260113565704

**Part.no. NS0031**

## Gigabit 19“ Switch, 16-Port

Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab Compatible
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Connectors: 16x RJ45
LED indicate operation, activity and collision
Automatic speed detection
Store and Forward architecture
Auto MDI / MDI-X Function
Including 19“ Rackmount brackets
EAN: 4260113566930

**Part.no. NS0032**

## Gigabit 19“ Switch, 24-Port

Gigabit Desktop Switch
IEEE802.3, 802.3u and 802.3ab Compatible
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Connectors: 24x RJ45 Anschlüsse
LED indicate operation, activity and collision
Automatic speed detection
Store and Forward architecture
Auto MDI / MDI-X Function
Including 19“ Rackmount brackets
EAN: 4260113566947

**Part.no. NS0033**

## DSL Broadband Router, 4-port Switch

Broadband Router with 4-Port Switch
Supports: IEEE 802.3, IEEE 802.3u
Speed: 10/100 Mbit
Connectors: 1x RJ45 (WAN), 4x RJ45 (LAN)
Switch supports full-duplex, MDI, MDIX
DHCP server, virtual server, DMZ host
Static routing table, PPPoE, DHCP, ICMP, NAT
Firmware upgrade, Remote and Web management
Integrated firewall with IP Filter
EAN: 426011356505

**Part.no. NR0004**

## Fast Ethernet PCI Card, 10/100MBit

Fast Ethernet PCI Card
IEEE802.3, 802.3u, 802.3x
Speed: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Automatic speed detection
32 Bit PCI Rev.2.2
Connector: 1x RJ45
Chipset: Realtek
LED for Link, Activity, Error
EAN: 4260113565049

Part.no. PC0039

## USB 2.0 to Fast Ethernet Adapter

USB 2.0 to Fast Ethernet Adapter
Connector 1: USB A Plug
Connector 2: RJ 45 Jack
Ethernet: IEEE802.3, IEEE802.3u
Maximum Speed: 10/100 MBit
Specification according USB 2.0 Standard
Max. Speed: 480 Mbps
LED for USB and LAN
Automatic speed detection
EAN: 4260113565032

Part.no. UA0025C

## Gigabit PCI Card, 10/100/1000MBit

Gigabit PCI Card
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Automatic speed detection
32 Bit PCI Rev.2.2
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for Link, Activity, Error
EAN: 4260113561652

Part.no. PC0012

## Gigabit PCI Express Card, 10/100/1000MBit

Gigabit PCI Express card
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Automatic speed detection
Chipset: Agere
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for Link, Activity, Error
EAN: 4260113564745

Part.no. PC0029A

## Gigabit PC Card, 10/100/1000MBit

Gigabit PC Karte
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Automatic speed detection
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for Link, Activity, Error
EAN: 4260113561645

CardBus

**Part.no. PC0011**

## Gigabit Express Card, 10/100/1000MBit

Gigabit Express card
IEEE 802.3,802.3ab,802.3u,802.1q
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Chipset: Agere
Connector: 1x RJ45
Express Card 34mm Standard
Compatible to 1-Lane PCI-Express
EAN: 4260113563953

ExpressCard|34

**Part.no. PC0035**

# Patch- & Installation Cable

| | | | |
|---|---|---|---|
| CAT5e Patch & Installation Cable UTP, color grey | | | |
| Part.no. CPV0014 | CAT5e | Stranded | Patch Cable UTP 100m |
| Part.no. CPV0015 | CAT5e | Stranded | Patch Cable UTP 305m |
| Part.no. CPV0019 | CAT5e | Solid | Installation Cable UTP 100m |
| Part.no. CPV0020 | CAT5e | Solid | Installation Cable UTP 305m |
| | | | |
| CAT5e Patch & Installation Cable FTP, color grey | | | |
| Part.no. CPV0013 | CAT5e | Stranded | Patch Cable FTP 100m |
| Part.no. CPV0016 | CAT5e | Stranded | Patch Cable FTP 305m |
| Part.no. CPV001 | CAT5e | Solid | Installation Cable FTP 100m |
| Part.no. CPV003 | CAT5e | Solid | Installation Cable FTP 305m |
| | | | |
| CAT5e Patch & Installation Cable SFTP, color grey | | | |
| Part.no. CPV0017 | CAT5e | Stranded | Patch Cable SFTP 100m |
| Part.no. CPV0018 | CAT5e | Stranded | Patch Cable SFTP 305m |
| Part.no. CPV007 | CAT5e | Solid | Installation Cable SFTP 100m |
| Part.no. CPV009 | CAT5e | Solid | Installation Cable SFTP 305m |
| | | | |
| CAT6 Patch & Installation Cable UTP, color grey | | | |
| Part.no. CPV0021 | CAT6 | Stranded | Patch Cable UTP 100m |
| Part.no. CPV0023 | CAT6 | Solid | Installation Cable 100m |
| | | | |
| CAT6 Patch & Installation Cable SSTP, color grey | | | |
| Part.no. CPV0029 | CAT6 | Stranded | Patch Cable SSTP 100m |
| Part.no. CPV0030 | CAT6 | Stranded | Patch Cable SSTP 305m |
| Part.no. CPV0031 | CAT6 | Solid | Installation Cable SSTP 100m |
| Part.no. CPV0032 | CAT6 | Solid | Installation Cable SSTP 305m |

## Multi Modular Crimping Tool, Metal

Multifunctional Modular Tool
for crimping cables for Network and Telephone
Smooth-running cable cutter
Easy cable stripping
Crimping tool for 8P8C-RJ45, 6P6C-RJ12
6P4C-RJ11, 4P4C, 4P2C, DEC
shielded 8P8C-RJ45 Modular Plug
Blade cover lever action
Rubbered, non-slip plastic handles
Tool made of high-grade metal
EAN: 4260113563502

**Part.no. WZ0003**

## Multi Modular Crimping Tool

Multifunctional Modular Tool
for crimping cables for Network and Telephone
Smooth-running cable cutter
Easy cable stripping
Crimping tool for 8P8C-RJ45, 6P6C-RJ12
6P4C-RJ11, 4P4C, 4P2C, DEC
shielded 8P8C-RJ45 Modular Plug
Blade cover lever action
Tool made of rugged plastic
EAN: 4260113564219

**Part.no. WZ0009**

## Modular Crimping Tool for 8P8C

Multifunctional Modular Tool
for crimping cables for Network and Telephone
Smooth-running cable cutter
Easy cable stripping
Crimping tool suitable for shielded and
unshielded 8P8C-RJ45 Modular Plugs
Blade cover
Rubbered, non-slip plastic handles
Tool made of high-grade metal
EAN: 4260113563441

**Part.no. WZ0004**

## Stripper Tool

Universal Cable Stripping tool
No damages of the inner conductor
Stripping of the outer coating
Intergrated cable cutter
Suitable for Patch- and installation cable
Tool made of high-quality plastic
EAN: 4260113563458

**Part.no. WZ0005**

## Cable Puller

Cable puller for professional use
Suitable for Power-, Network-, Telephone cables etc.
Simplified installation even in complex cable shafts and difficult environment
Suitable for straight and curved cable channels
Roll up mechanism for the guide wire
Fixing system for the cable end
Practical handle, fixed locking device
Material: hardened metal drum from out of plastic
Guiding length: up to 60 Meter

**Part.no. WZ0006 / 15 m**
**Part.no. WZ0007 / 30 m**
**Part.no. WZ0008 / 60 m**

## Cable Tester for RJ11 & RJ12 & RJ45

Cable Tester for RJ11/RJ12/RJ45
Master & Remote unit
Suitable for all types of patch cables
Various LEDs for status
Loop back: Localization of laid network of cable
Continuity: of network or communication cable
Open: disconnected single wires
Shorts: short circuited single wires
Miss-wire: identification of non conform wire assignment
Powered by 1x 9 Volt block battery (not included)
EAN: 4260113564226

**Part.no. WZ0010**

## Cable Tester for RJ45 & BNC

Cable Tester for RJ45 and BNC
Master & Remote unit
Suitable for Patch- and BNC cables
Various LEDs for status
Loop back: Localization of laid network of cable
Continuity: of network or communication cable
Open: disconnected single wires
Shorts: short circuited single wires
Miss-wire: identification of non conform wire assignment
Powered by 1x 9 Volt block battery (not included)
EAN: 4260113564233

**Part.no. WZ0011**

## HDMI Video Switch, 3-Port

HDMI Switch with Amplifier
IN: 3x HDMI Jack
OUT: 1x HDMI Jack
VGA Resolution: 640x480 up to 1920x1200
HDTV:480i/576i/480p/576p/720p/1080i/1080P
Supports: HDMI + HDCP pass through
Bandwidth: 2.5Gbps / 250MHz
Vertical Frequency: 60 Hz
Specification: HDMI1.3 + HDCP1.0/1.1
Power supply + Remote control included
EAN: 4260113565421

**Part.no. HD0001**

## HDMI Mini Video Switch, 3-Port

HDMI Switch with Amplifier
IN: 3x HDMI Jack
OUT: 1x HDMI Jack
VGA Resolution: 640x480 up to 1920x1200
HDTV:480i/576i/480p/576p/720p/1080i/1080P
Supports: HDMI + HDCP pass through
Bandwidth: 2.5Gbps / 250MHz
Vertical Frequency: 60 Hz
Specification: HDMI1.3 + HDCP1.0/1.1
IR-Adapter + Remote control included
EAN: 4260113566855

**Part.no. HD0003**

## HDMI Video Spiltter, 4-Port

HDMI Splitter with Amplifier
IN: 1x HDMI Jack
OUT: 4x HDMI Jack
VGA Resolution: 640x480 up to 1920x1200
HDTV:480i/576i/480p/576p/720p/1080i/1080P
Supports: HDMI + HDCP pass through
Bandwidth: 1.65Gpbs / 165MHz
Vertical Frequency: 60 Hz
Specification: HDMI 1.2+ HDCP 1.0/1.1
Power supply included
EAN: 4260113565735

**Part.no. HD0002**

## HDMI Video Repeater up to 40 Meter

Extends the HDMI Signal up to 40m
IN: 1x HDMI Jack
OUT: 1x HDMI Jack
VGA Resolution: 640x480 bis 1920x1200
HDTV:480i/576i/480p/576p/720p/1080i/1080P
Supports: HDMI + HDCP pass through
Bandwidth: 1.65Gpbs / 165MHz
Vertical Frequency: 60 Hz
Specification: HDMI 1.2+ HDCP 1.0/1.1
4 Repeater cascadable up to 145 Meter
EAN: 4260113565414

**Part.no. HD0101**

## HDMI Video Extender up to 50 Meter

Extends the HDMI Signal up to 50m over CAT5 cable
IN: 1x HDMI Jack
Out: 2x RJ45 Jack
Supports HDMI and DVI Input
HDTV: 480i/576i/480p/576p/720p/1080i/1080P
Supports: HDMI + HDCP pass through
Bandwidth: 2.25 Gbits x 3
Specification: HDMI1.3
Power supply included
EAN: 4260113565742

Part.no. HD0102

## HDMI High Quality Cable

High Quality HDMI Connection Cable
2x HDMI Typ A, 19-pin Plug
LogiLink Logo on Plugs
Cable packed in High Quality Blister
Transmission of audio and video data
Supports HDMI 1.3b and also: 480i, 480p, 720p, 1080i, 1080p
EAN: 4260113565322 ( 2m)
EAN: 4260113566893 ( 3m)

Part.no. CH0011 / 2m
Part.no. CH0014 / 3m

## HDMI Adapter 90° angeled

HDMI Adapter 90° angled
Connector 1: HDMI 19-pin Jack
Connector 2: HDMI 19-pin Plug
Gold contacts
Transmission of audio and video data
Supports HDMI 1.3b and also: 480i, 480p, 720p, 1080i, 1080p
EAN: 4260113566381

Part.no. AH0005

## HDMI Extension Adapter

HDMI Adapter
Connector 1: HDMI 19-pin Jack
Connector 2: HDMI 19-pin Jack
Gold contacts
Transmission of audio and video data
Supports HDMI 1.3b and also: 480i, 480p, 720p, 1080i, 1080p
EAN: 4260113566398

Part.no. AH0006

## Internal 3,5“ Cardreader, with USB 2.0 Port

3.5“ Multi-Cardreader for Drive Bay
Multi Card Read/Write device for:
Compaq Flash (CF), Smart Media (SM), XD
Memory Stick (MS), and Secure Digital (SD)
Connection to an internal USB 2.0 “Port”
Max. data transfer rate: 480 MBit
Power Supply: internal
USB 2.0 Connector in Frontpanel
3 Faceplates (black/silver/white)
EAN: 4260113564998

Part.no. CR0005C

## USB 2.0 Mini Cardreader, SD-HC Cards

USB 2.0 Cardreader Mini Format
Card Read/Write device for
all MMC, RS-MMC, SD and SD HC Memory cards
Connection to an external USB 2.0 Port
Max. data transfer rate: 480 Mbit /Sec.
Power supply: DC +5,0 Volt via USB bus
Suitable for MAC and PC
EAN: 4260113566916

Part.no. CR0007

## USB 2.0 Multi-Cardreader, SD-HC Cards

USB 2.0 Multi-Cardreader
Multi Card Read/Write device for
Compaq Flash (CF), Smart Media (SM), XD
Memory Stick (MS), and Secure Digital (SD)
Supports new SD-HC Karten
Connection to an external USB 2.0 Port
Max. data transfer rate: 480 MBit
Power supply: DC +5,0 Volt via USB bus
USB Connection Cable included
Suitable for MAC and PC
EAN: 4260113560129

Part.no. CR0001A

## USB 2.0 Pocket Multi-Cardreader

USB 2.0 Multi-Cardreader
Multi MemoryCard Read/Write device for
Compaq Flash (CF), Smart Media (SM), XD
Memory Stick (MS), and Secure Digital (SD
Connection to an external USB 2.0 Port
Max. data transfer rate: 480 MBit
Power supply: DC +5,0 Volt via USB bus
USB Connection Cable included
Suitable for MAC and PC
EAN: 4260113564004

Part.no. CR0004

## USB 2.0 HUB, 4-Port, Bus Powered

USB 2.0 HUB
4 x USB 2.0 Ports
Housing made of high-grade plastic
Max. data transfer rate: 480 MBit
USB Connection Cable included
Supports Hot Plug
No driver installation needed
Plug & Play
Power supply via USB bus
EAN: 4260113564875

Part.no. UA0038

## USB 2.0 HUB, 4-Port, Bus Powered

USB 2.0 HUB
4 x USB 2.0 Ports
Housing made of high-grade plastic
LED displays activity
Max. data transfer rate: 480 MBit
USB Connection Cable included
Supports Hot Plug
No driver installation needed
Plug & Play
Power supply via USB bus
EAN: 4260113564035

Part.no. UH0001A

## USB 2.0 HUB, 4-Port, incl. Power supply

USB 2.0 HUB
4 x USB 2.0 Ports
Housing made of high-grade plastic
Max. data transfer rate: 480 MBit
Supports Hot Plug
No driver installation needed
Plug & Play
Delivery with: USB Connection Cable
+ Power supply 220 Volt
EAN: 4260113564509

Part.no. UA0018A / weiss
Part.no. UA0018 / schwarz

## USB 2.0 HUB, 4-Port, incl. Power supply

USB 2.0 HUB
4 x USB 2.0 Ports
Housing made of high-grade plastic
Max. data transfer rate: 480 MBit
Supports Hot Plug
No driver installation needed
Plug & Play
Delivery with: USB Connection Cable
+ Power supply 220 Volt
EAN: 4260113564509

Part.no. UA0027

USB 2.0 HUB

## USB 2.0 HUB, 4-Port, incl. Power supply

USB 2.0 HUB
4 x USB 2.0 Ports
Housing made of high-grade aluminum
Max. data transfer rate: 480 MBit
Supports Hot Plug
No driver installation needed
Plug & Play
Delivery with: USB Connection Cable
+ Power supply220 Volt
EAN: 4260113560570

**Part.no. UA0003**

## USB 2.0 HUB, 7-port, incl. Power supply

USB 2.0 HUB
7 x USB 2.0 Ports
Housing made of high-grade plastic
Blue LED Lighting
Max. data transfer rate: 480 MBit
No driver installation needed
Hot Plug and Plug & Play
Delivery with: USB Connection Cable
+ Power supply 220 Volt
EAN: 4260113565001

**Part.no. UA0026A**

## Multifunction internal 3,5“ Frontpanel

3.5“ Multifunctionpanel
1x All-in-One Cardreader
1x USB 2.0 Port
1x IEEE1394a Fire Wire Port
1x S-ATA Port
1x E-SATA Port
2x Audio: Micro-In, Audio-Out
Including Cables and Screw set
For all Desktop, AT and ATX PC cases
LED for operation and activity
EAN: 4260113564370

**Part.no. UA0035**

## Multifunction internal 5,25“ Frontpanel

5,25“ Multifunktionspanel
1x All-in-One Cardreader
2x USB 2.0 Port
1x TV-Out
2x E-SATA Port
1x Audio In: Micro, Line-In
1x Audio Out: Headset, Speakers
Including Cables and Screw set
For all Desktop, AT and ATX PC cases
LED for operation and activity
EAN: 4260113564387

**Part.no. UA0036**

Mini Type

IVT

Broadcom

Bluetooth

2.0 USB

## USB 2.0 Bluetooth Adapter, V2.0+EDR, Class 2

USB 2.0 Mini Bluetooth Adapter
Bluetooth V2.0, Compatible to V1.2, V1.1
Chipset: Broadcom
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer: 3 Mbps
Max. distance: 50 meter
IVT Software included
Suitable for Windows 2000/XP/Vista
EAN: 4260113566589

Part.no. BT0006

Toshiba

CSR

Bluetooth

2.0 USB

## USB 2.0 Bluetooth Adapter, V2.0+EDR, Class 2

USB 2.0 Bluetooth Adapter
Bluetooth V2.0, Compatible to V1.2, V1.1
Chipset: CSR
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer: 3 Mbps
Max. distance: 50 Meter
Protection cap
Toshiba Software included
Suitable for Windows 2000/XP/Vista
EAN: 4260113564462

Part.no. BT0002

IVT

ISSC

Bluetooth

2.0 USB

## USB 2.0 Bluetooth Adapter, V2.0+EDR, Class 2

USB 2.0 Bluetooth Adapter
Bluetooth V2.0, Compatible to V1.2, V1.1
Chipset: ISSC
Transmission frequency: 2.4GHz- 2.4835GHz
Datatransfer: 3 Mbps
Max. distance: 50 Meter
Protection cap
IVT Software included
Suitable for Windows 2000/XP/Vista
EAN: 4260113564462

Part.no. BT0004

Bluetooth

## Bluetooth Headset V2.0+EDR

Bluetooth headset with Microphone
Bluetooth V.2, Compatible to V1.2, V1.1
Transmission frequency: 2.4-2.480 GHz
Class 2, Distance: 5-10 meter
Lithium Polymer rechargeable battery
Charger for USB Connector
Standby: 200 Std., Talking time 4 Std.
Volume control, Power on/off
LED for Power, Charging, Low Battery
EAN: 4260113565476

Part.no. BT0005

## USB 2.0 to Serial Adapter

USB 2.0 to Serial Adapter
Connector 1: USB A Plug
Connector 2: RS232 (9-pin) Plug
Fixing with thumbscrews
Specification according USB 2.0 Standard
Max. Speed: 480 MBit
Molded housing
incl. 80cm USB extension cable
EAN: 4260113563175

Part.no. AU0002B

## USB 2.0 to Serial Adapter, 9+25 Pin

USB 2.0 to Serial Adapter
Connector 1: USB A Plug
Connector 2: RS232 (9-pin) Plug
Incl. Adapter DSUB-9 to DSUB-25
Fixing with thumbscrews
Specification according USB 2.0 Standard
Max. Speed: 480 MBit
Molded housing
Cable length: ca. 1.2m
EAN: 4260113565384

Part.no. UA0042

## USB 2.0 to Parallel Adapter

USB 2.0 to Parallel Adapter
Connector 1: USB A Plug
Connector 2: Centronics 36-pin Plug
Fixing with Clip System
Specification according USB Standard
USB full speed (12Mbps)
Molded housing
Supports EPP, ECP, bidirectional
Cable length: ca. 1.5m
EAN: 4260113563182

Part.no. AU0003B

## USB 2.0 to IDE Adapter

USB 2.0 to IDE Adapter
Connection Computer: USB A Plug
Connector 1: 3.5" HDD 40-pin Jack
Connector 2: 2.5" HDD 44-pin Jack
Max. Speed: 480 MBit
Molded housing
Supports also CDROM and DVD(R)
Cable length: 1.2 Meter
Incl. 5,25" power cable
EAN: 4260113563878

Part.no. AU0005A

## USB 2.0 to IDE & SATA Adapter

USB 2.0 to IDE & SATA Adapter
Connection Computer: USB A Plug
Connector 1: 3.5“ HDD / 40-pin Jack
Connector 2: 2.5“ HDD / 44-pin Jack
Connector 3: SATA Jack
Max. Speed: 480 MBit
Molded housing
Supports also CDROM and DVD(R)
Cable length: 1.2 Meter
Incl. 5,25“ power cable, SATA cable + 220V power supply
EAN: 4260113563885

**Part.no. AU0006B**

## USB to PS/2 Adapter

USB to PS/2 Adapter
Connector 1: USB A Plug
Connector 2: 2x Mini DIN 6-pin Jack
Suitable for Mouse and Keyboard
Specification according USB 1.1 Standard
Max. Speed: 12 Mbps
Molded housing
Cable length: ca. 30cm
EAN: 4260113560549

**Part.no. AU0004**

## USB 2.0 to eSATA + S-ATA Adapter

USB 2.0 to e-SATA & SATA Adapter
USB A Plug to e-SATA Jack
Included in delivery:
Cable adapter e-SATA Plug to S-ATA Plug
USB 2.0 Extension cable
Serial ATA 1.0a up to 1.5 GBit/s
Serial ATA 2.0 up to 3.0 GBit/s
Specification USB 2.0 Standard, 480 Mbps
No driver installation needed
EAN: 4260113566411

**Part.no. AD0007**

## USB MIDI Cable

USB MIDI Cable for Midi Devices & Keyboards
USB A Plug to 2x MIDI 5-pin DIN Plug IN/OUT
LED for operation and data stream direction
16 Midi Input and 16 Midi Output channels
No driver installation needed
Power supply via USB Connector
Cable length: 3,0 meter
EAN: 4260113564882

**Part.no. UA0037**

## USB Adapter

## USB 2.0 Vista® Easy Transfer Cable

Data transfer- and Connection cable
Connector 1: USB A Plug
Connector 2: USB A Plug
OS target PC: Microsoft Vista
OS source PC: Windows XP or Vista
Transfer via Software
Favourites, Configuration, files etc.
Data selection possible
Transfer in both directions possible
Network cable with Ressource sharing
EAN: 4260113564240

**Part.no. UA0030**

## USB 2.0 Repeater Cable

USB 2.0 Extension cable
Connector 1: USB A Plug
Connector 2: USB A Jack
Max. Transfer rate: 480 MBit
Cascadable
Cable length: 5,00 Meter
EAN: 4260113566275

**Part.no. UA0001A**

## USB 2.0 Netlink Cable

USB 2.0 Netlink Kabel
Connector 1: USB A Plug
Connector 2: USB A Plug
Suitable for transferring data
Max. Transfer rate: 480 MBit
Cable length: 2,00 Meter
EAN: 4260113561805

**Part.no. UA0017**

## USB Extender, up to 45M, via CAT5 UTP

USB Extender up to 45m
Extension over RJ45 Patch cable
Connector 1: USB A Plug
Connector 2: USB A Jack
Suitable for Mouse, Keyboard, Printer etc.
No drivers necessary
Patch cable not included
EAN: 4260113564868

**Part.no. UA0021B**

## Audio & Video Grabber USB 2.0

Digitizes Audio- and Videosignals
Interface: USB 2.0 A Plug
Connector A/V 1: RCA composite (S-VHS)
Connector A/V2: S-Video
Chipset: Philips SAA7113
IN PAL: 720 x 576 @ 25fps
IN NTSC: 720 x 480 @ 30fps
PC Display: 1024 x 768 or higher
Format: MP3, MPEG 1,2,4, DIVX
Software: Ulead Video Studio SE
EAN: 4260113566367

**Part.no. VG0001**

## USB Charger Set

Adapter Set for USB power supply
PSU Adapter: USB A Jack
Input: AC 100 V - 250 V, 50 Hz, 130 mA
Output: DC 5,0 V, +/- 5 %
Max: 1000 mA, +/- 50 mA
Car Charger Adapter: USB A Jack
Input: DC 12 V-24 V
Output: DC 5,0 V, +/- 5 %
Max: 500 mA
LED for operation and charging
EAN: 4260113566862

**Part.no. PA0006A**

## USB 2.0 Docking Station with LAN

USB 2.0 Docking Station with LAN
Connector to: USB 2.0 (downward compatible)
Max. data transfer rate: 480 MBit /Sek
1x USB B Upstream Port
2x USB 2.0 Extension Ports
2 x PS/2 Port for Mouse, Keyboard
1 x D-SUB 9-pin Serial Port
1 x IEEE 1284 Parallel Port
1 x RJ-45 Fast Ethernet Port, 10/100 Mbit
1 x USB File Transfer Host Link Port (USB 1.1)
EAN: 4260113560563

**Part.no. UA0002**

## USB Notebook Light, 1x LED

USB Notebook Light with LED
Lights keyboard and documents
Connect to USB Port
Power supply via USB Bus
Flexible gooseneck
Length: ca. 45 cm
Efficient LED Lamp
Light angle and inclination adjustable
Automatic activation while turning on Notebook
Low power consumption
EAN: 4260113565407

**Part.no. UA0043**

## USB Notebook Light, 5x LED

USB Notebook Light with 5x LED
Lights Keyboard and documents
Connect to USB Port
Power supply via USB Port
Flexible gooseneck
Length: ca. 30 cm
Efficient due to 5 LEDs
Light angle and inclination adjustable
Automatic activation while turning on notebook
Low power consumption
EAN: 4260113560624

**Part.no. UA0008**

## USB Notebook Light, 2x LED

USB Notebook Lampe
Lights Keyboard and documents
Connect to USB Port
Power supply via USB Port
Convenient fixation clip
Cable length: ca. 90 cm
Efficient due to 2 white LEDs
Light angle and inclination adjustable
Automatic activation while turning on notebook
Low power consumption
EAN: 4260113560631

**Part.no. UA0009**

## Notebook Lock with Number Code

Notebook anti-theft protection
Manufactured acc. industry-standards
Fixation at Notebook standard safety slash
Rugged steel cable, metal lock
Protective PVC Coating
Combination lock with 10.000 combination
Individual combination adjustable
Cable length: ca. 1.50 Meter
EAN: 4260113565377

**Part.no. NBS002**

## Notebook Lock with Key

Notebook anti-theft protection
Manufactured acc. industry-standards
Fixation at Notebook standard safety slash
Rugged steel cable, metal lock
Protective PVC Coating
Lock with 2 Keys
Cylinder out of hardened steel
Cable length: ca. 1.50 Meter
EAN: 4260113565353

**Part.no. NBS003**

## USB Notebook Travel Set

USB Notebook Set composed of:
1) Optical USB Mini Mouse 3 buttons
800 dpi, Scroll wheel, convenient Flexcable
2)USB Numeric Keypad, 18 keys, LED for operation
3)USB 2.0 Mini 4-Port Hub with LED,
Power supply over USB Bus
4)USB LED Light with flexible gooseneck
5) High quality case with zipper
EAN: 4260113560648

Part.no. UA0010

## USB VoIP Handset Phone

VoIP Handset for Internet Telephony
Connect to USB Port
Substitute for Mikrophone and Speakers
Dial function over IP Software
Optimized for Skype
Plug & Play
Flexible Coil cable
Power supply over USB Bus
No soundcard needed
EAN: 4260113560594

Part.no. UA0005

## USB VoIP Handset Phone with Display

VoIP Handset for Internet Telephony
Connect to USB Port
LCD Display
Easy to use dial buttons
Optimized for Skype
Ring tone when incoming call
Volume adjustable
Power supply over USB Bus
Additional LEDs for operation
No soundcard needed
EAN: 4260113560600

Part.no. UA0006

## USB VoIP Desktop Phone with Display

VoIP Handset for Internet Telephony
Connect to USB Port
LCD Display
Easy to use dial buttons
Optimized for Skype
Ring tone when incoming call
Volume adjustable
Power supply over USB Bus
Additional LEDs for operation
No soundcard needed
EAN: 4260113560600

Part.no. UA0007

## Laser Mouse USB & PS/2 Combo 2000dpi

Laser Mouse 2000dpi
Suitable for USB and PS/2 Port
3 programmable Functions keys
Vertical Scroll wheel
Housing LED illuminated
Resolution 1200 - 2000 dpi
Usable on nearly every surface
Connection Cable ca. 1.50 Meter
Suitable for right and left hand use
Plug & Play
EAN: 4260113566602

**Part.no. ID0009**

## Optical Notebook Mouse USB 800dpi

Optical Notebook Mouse 800dpi
Suitable for USB Port
3 programmable Functions keys
Vertical Scroll wheel
Housing LED illuminated / blue-red
Resolution 800 dpi
Usable on nearly every surface
Connection Cable ca. 1.50 Meter
Suitable for right and left hand use
Plug & Play
EAN: 4260113566619

**Part.no. ID0010**

## Optical Mouse USB 800pdi

Optical Mouse 800dpi
Suitable for USB Port
3 programmable Functions keys
Vertical Scroll wheel
Resolution 800 dpi
Usable on nearly every surface
Connection Cable ca. 1.50 Meter
Suitable for right and left hand use
Plug & Play
EAN: 4260113566626

**Part.no. ID0011**

## Numeric Keypad USB

Additional Numeric Keypad for Notebooks
Modern Soft membrane technology
19 Keys with multiple configuration
3 Hotkeys: My calculator, My computer , Escape
Connection Cable ca. 1.5 Meter
Ideal for fast data input
Connector: USB Type A
No driver installation needed
Hot Plugin resp. Plug & Play
EAN: 4260113566374

**Part.no. ID0008**

## USB 2.0 Webcam, 300K Pixel

USB 2.0 Webcam
Sensor: 300K CMOS
Max. Resolution: 640x480
Colors: 24 Bit True Color
Video: up to 30 fps
Focus adjustable, white balance
Auto exposure
Hot Plug and Plug & Play
Monitor fixation clip
EAN: 4260113561775

Part.no. UA0015

## USB 2.0 Webcam, 1.3M Pixel, 6x LED

USB 2.0 Webcam with Mikrophone
Connector: USB + 3.5mm phone jack
Sensor: 1.3 Megapixel CMOS
Max. Resolution: 1280x960
Colors: 24 Bit True Color
Video: up to 30 fps
6x LED illuminate when dark
Hot Plug and Plug & Play
Monitor fixation clip
EAN: 4260113560587

Part.no. UA0004

## USB 2.0 Webcam, 1.3M Pixel

USB 2.0 Webcam with Mikrophone
Connector: USB + 3.5mm phone jack
Intergrated Snapshot button
Sensor: 1.3 Megapixel CMOS
Max. Resolution: 1280x960
Colors: 24 Bit True Color
Video: up to 30 fps
Hot Plug and Plug & Play
Monitor fixation clip and Stand
EAN: 4260113563144

Part.no. UA0023

## USB 2.0 Webcam with Stereo Headset Kit

USB 2.0 Webcam with Microphone
Connector: USB + 3,5mm Phone jack
Intergrierte Snap-Shot Taste
Sensor: 1.3 Megapixel CMOS
Max. Resolution: 1280x960
Farbe: 24 Bit True Color
Video: bis 30 Bilder/Sekunde
Stereo Headset with Microphone
2x 3.5 mm Phone jack
Integrated Volume Control
EAN: 4260113565940

Part.no. UA0051

## Stereo Headset with Microphone DeLuxe

Stereo Headset with Microphone
2x 3.5 mm phone jack
Connector colors standardised acc. to PC99
Integrated Volume Control
Microphone: 9x7/58 +- 2dB
Impedance: 32 Ohm @ 1 KHz
Sensitivity: 105 dB/mW
Frequency: 8 to 22.000 Hz
Cable length: ca. 3 Meter
EAN: 4260113563588

**Part.no. HS0001**

## Stereo Headset with Microphone Easy

Stereo Headset with Microphone
2x 3.5 mm Phone jack
Connector colors standardised acc. to PC99
Integrated Volume Control
Microphone: 9x7/58 +- 2dB
Impedance: 32 Ohm @ 1 KHz
Sensitivity: 105 dB/mW
Frequency: 8 to 22.000 Hz
Cable length: ca. 3 Meter
EAN: 4260113563595

**Part.no. HS0002**

## Stereo Headset Comfort

Stereo Headset with high wearing comfort and Mic
2x 3.5 mm Phone jack
Connector colors standardised acc. to PC99
Microphone: 6x5/58 +- 2dB
Impedance: 32 Ohm @ 1 KHz
Sensitivity: 105 dB/mW
Frequency: 8 to 22.000 Hz
Connector colors standardised acc. to PC99
Cable length: ca. 3 Meter
EAN: 4260113565629

**Part.no. HS0011**

## Stereo Headset with Bass-Vibration

Stereo Headset with Bass Vibration and Microphone
2x 3.5 mm Phone jack
Connector colors standardised acc. to PC99
Integrated Volume Control
Microphone: 6x5/58 +- 2dB
Impedance: 32 Ohm @ 1 KHz
Sensitivity: 105 dB/mW
Frequency: 8 to 22.000 Hz
Power supply over USB or Battery
Cable length: ca. 3 Meter
EAN: 4260113565605

**Part.no. HS0009**

Bass Vibration

## Audio Desktop Switch, 2-Port

Audio Switch for Headset and Speakers
Input Speakers: 3.5 mm Jack
Input Headset MIC: 3.5 mm Jack
Input Headset SP: 3.5 mm Jack
Output SoundCard MIC: 3.5 mm Plug
Output SoundCard SP: 3.5 mm Plug
Intergrated Volume control
Microphone ON/OFF Switch
Selector switch Headset or Speakers
Cable length: 2.50 meter
EAN: 4260113565612

**Part.no. HS0010**

## USB 2.0 Audio Adapter, 5.1 Sound Effect

Audio Switch for Headset and Speakers
Input Speakers: 3.5 mm Jack
Input Headset MIC: 3.5 mm Jack
Input Headset SP: 3.5 mm Jack
Output SoundCard MIC: 3.5 mm Plug
Output SoundCard SP: 3.5 mm Plug
Intergrated Volume control
Microphone ON/OFF Switch
Selector switch Headset or Speakers
Cable length: 2.50 meter
EAN: 4260113565612

**Part.no. UA0053**

## USB MIDI Cable

USB MIDI Kabel for Midi Devices & Keyboards
USB A Plug to 2x MIDI 5-pin DIN Plug IN/OUT
LED for Operation and Data stream direction
16 Midi Input and 16 Midi Output channels
No driver installation needed
Power supply over USB
Cable length: 3.0 meter
EAN: 4260113564882

**Part.no. UA0037**

## LogiLink 17“ Notebookbag

Bag for 14“ - 17“ Notebooks
Material: Nylon
Two leather handles
Removable shoulder starp
Several storage facilities and pockets
Outer dimensions: 400 x 315 x 90 mm
EAN: 4260113566480

**Part.no. NB0001**

## USB 2.0 2,5“ IDE HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 2.5“ IDE HDD
Supports High Capacity HDD
Transfer rate: 480 MBit
Power supply over USB Port
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection Cable
EAN: 4260113565858

Part.no. UA0049

## USB 2.0 2,5“ IDE HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 2.5“ IDE HDD
Supports High Capacity HDD
Transfer rate: 480 MBit
Power supply over USB Port
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection Cable
+ protective bag and screwdriver
EAN: 4260113565339

Part.no. UA0040

## USB 2.0 2,5“ SATA HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 2.5“ SATA HDD
Supports High Capacity HDD
Transfer rate: 480 MBit
Power supply over USB Port
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection Cable
+ protective bag and screwdriver
EAN: 4260113565346

Part.no. UA0041

## USB 2.0 3,5“ IDE HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 3.5“ IDE HDD
With Fast Ethernet Connector 1x RJ45
IEEE802.3, IEEE802.3u,
Transfer rate: 480 MBit
Supports NTSC
Power supply 220 Volt included
Aluminium housing
Included in delivery: USB Connection Cable
+ Power supply 220 Volt
EAN: 4260113564011

**Part.no. UA0028**

## USB 2.0 3,5“ IDE HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 3.5“ IDE HDD
Supports High Capacity HDD
Transfer rate: 480 Mbit
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection
Cable + Power supply 220 Volt
EAN: 4260113562925

**Part.no. UA0019**

## USB 2.0 3,5“ SATA HDD Enclosure

External USB 2.0 Harddisk enclosure
Suitable for 3.5“ SATA HDD
Supports High Capacity HDD
Transfer rate: 480 Mbit
Power supply over USB
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection Cable
EAN: 4260113563090

**Part.no. UA0022**

## USB 2.0 5,25“ CD-DVD Enclosure

External USB 2.0 Enclosure
For use as external Drive
Compatible to CD-ROM and DVD
Supports all Speeds
Transfer rate: 480 Mbit
Housing made of high-grade aluminum
Hot-Plug and Plug & Play
No driver installation needed
Included in delivery: USB 2.0 Connection
Cable + Power supply 220 Volt
EAN: 4260113560679

**Part.no. UA0013**

## Cooling Fan, 80x80x25mm

PC Cooling Fan
Flow Rate: 50 CFM
Noise: 32,6 dB(A)
Working Voltage: 12 V DC
Voltage range: 12 V DC
Power consumption: 16 mA
Nominal speed: 2.500 U/min
Lifetime: 30.000 hours
Connector: 5.25“ Y-Connector
Bearing: Floating bearing
EAN: 4260113565254

**Part.no. FAN101**

## Cooling Fan, 80x80x25mm, with blue LED

PC Gehäuselüfter with blue LEDs
Flow Rate: 42,5 CFM
Noise: 32,6 dB(A)
Working Voltage: 12 V DC
Voltage range: 12 V DC
Power consumption: 16 mA
Nominal speed: 2.500 U/min
Lifetime: 30.000 Stunden
Connector: 5.25“ Y-Connector
Bearing: Floating Bearing
EAN: 4260113565261

**Part.no. FAN102**

## SATA to IDE Converter

Run IDE Devices on SATA Controler
Connector 1: S-ATA Plug
Source: Mainboard or Controller
Connector 2: IDE 40-pin Jack
Target: IDE harddisk, CD, DVD, etc.
No drivers needed
Included in delivery: Converter
+ S-ATA Connection Cable
+ internal power cable
EAN: 4260113566312

**Part.no. AD0005A**

## IDE to SATA Converter

Run SATA Devices on IDE Controler
Connector 1: IDE 40-pin Jack
Source: Mainboard or IDE Controller
Connector 2: S-ATA
Target: S-ATA HDD, DVD, etc.
No drivers needed
Included in delivery: Converter
+ S-ATA Connection Cable
+ internal power cable
EAN: 4260113566329

**Part.no. AD0006A**

## USB 2.0 PCI Card, NEC Chip

USB 2.0 PCI Card
3x USB 2.0 Type A Jack external (PC0008)
4x USB 2.0 Type A Jack external (PC0041)
1x USB 2.0 Type A Jack internal
Automatic IRQ adressing
Max. Speed: 480MBit
Internal Overvoltage protection
Plug & Play
Chipset: NEC
EAN: 4260113560716(PC0008)
EAN: 4260113565452(PC0041)

Part.no. PC0008 / 3+1
Part.no. PC0041 / 4+1

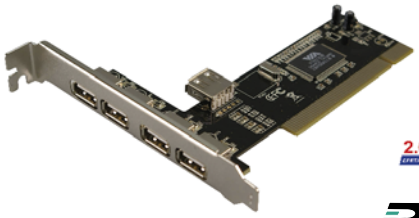

## USB 2.0 PCI Card, 4+1, VIA Chip

USB 2.0 PCI Card
4x USB 2.0 Type A Jack external
1x USB 2.0 Type A Jack internal
Automatic IRQ adressing
Max. Speed: 480MBit
Internal Overvoltage protection
Plug & Play
Chipset: VIA
EAN: 4260113563526

Part.no. PC0028

## IEEE1394a PCI Card, 3+1

IEEE1394a PCI Card
3x IEEE1394 6-pin external jack
1x IEEE1394 6-pin internal jack
Automatic IRQ adressing
Max. Speed: 400MBit
Internal Overvoltage protection
Incl. IEEE1394a 6-Pin to 4-Pin cable
Plug & Play
Chipset: VIA
EAN: 4260113564288

Part.no. PC0006A

## USB 2.0/IEEE1394a Combo PCI Card

USB 2.0/IEEE1394a Combo PCI Card
External: 4x USB 2.0 Typ A, 2x IEEE1394a
Internal: 1x USB 2.0 Typ A, 1x IEEE1394a
Automatic IRQ adressing
Internal Overvoltage protection
Incl. IEEE1394a 6-Pin to 4-Pin cable
Plug & Play
EAN: 4260113564257

Part.no. PC0007A

PCI Card

## PCI Card, 1x Parallel

PCI card 1x Parallel
1x D-SUB 25-pin external
Specification according IEEE1248
Automatic IRQ adressing
Printermode: SPP, EPP, ECP
Bidirectional Support
Plug & Play
EAN: 4260113561836

**Part.no. PC0013**

## PCI Card, 2x Parallel

PCI card 2x Parallel
2x D-SUB 25-pin external
Specification according IEEE1248
Automatic IRQ adressing
Printermode: SPP, EPP, ECP
Bidirectional Support
Plug & Play
EAN: 4260113561843

**Part.no. PC0014**

## PCI Card, 1x Serial

PCI card 1x Serial
1x RS232 9-pin external
Specification according 16C550 UART
Automatic IRQ adressing
Max. Speed: 1 Mbyte/sec
Supports 16 Byte transmit receive
Plug & Play
EAN: 4260113561850

**Part.no. PC0015**

## PCI Card, 2x Serial

PCI card 2x Serial
2x RS232 9-pin external
Specification according 16C550 UART
Automatic IRQ adressing
Max. Speed: 1 Mbyte/sec
Supports 16 Byte transmit receive
Plug & Play
EAN: 4260113561867

**Part.no. PC0016**

Serial

PCI

## PCI Card, 4x Serial

PCI card 4x Serial
4x RS232 9-pin external
Specification according 16C550 UART
Automatic IRQ adressing
Max. Speed: 1 Mbyte/sec
Supports 16 Bytetransmit receive
Plug & Play
EAN: 4260113561874

Part.no. PC0017

Serial

Parallel

PCI

## PCI Card, 2x Serial & 1x Parallel

PCI card 2x Serial + 1x Parallel
2x RS232 9-pin external
1x D-SUB 25-pin external
Specification: 16C550 UART & IEEE1248
Automatic IRQ adressing
Plug & Play
EAN: 4260113561881

Part.no. PC0018

PCI

## Fast Ethernet PCI Card, 10/100MBit

Fast Ethernet PCI Card
IEEE802.3, 802.3u, 802.3x
Speed: 10/100 MBit
In Full Duplex Mode up to 20/200 MBit
Automatic speed detection
32 Bit PCI Rev.2.2
Connector: 1x RJ45
Chipset: Realtek
LED for Link, Activity, Error
EAN: 4260113565049

Part.no. PC0039

PCI

## Gigabit PCI Card, 10/100/1000MBit

LAN Card fort he PCI Slot
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Automatic speed detection
32 Bit PCI Rev.2.2
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for Link, Activity, Error
EAN: 4260113561652

Part.no. PC0012

PCI Card

## SATA PCI Card, 1x e-SATA, 1x SATA & 1x IDE

SATA PCI Card
1x e-SATA external
1x SATA and 1x IDE 40-pin internal
Automatic IRQ adressing
Max. Speed: 150 Mbps
Internal Overvoltage protection
Plug & Play
EAN: 4260113565469

**Part.no. PC0005A**

## PCI Sound Card, 5.1 Channel

PCI Soundcard
Intergrated 5.1 Decoder
Supports 2, 4, 6 Channel Speakers
Modi: 2.0, 2.1, 4.0, 4.1, 5.1
Full-Duplex Playback and Record
Game and MIDI Connector
Chipset: FM801
64-bit Sound Effects
Direct Sound 3D and A3D Interface
EAN: 4260113563519

**Part.no. PC0027**

## PC Card to PCI Add-On Card, RICOH Chip

PC Card to PCI Card
PCI according Local Bus Specification 2.2
and PC Card acc. Standard Release 8.0
Suitable for PC Card Type 1, 2 and 3
Compatible to 32-bit PC card 3.3V and 5V
Supports Hot Swapping
LED for operation resp. failure
Plug & Play
Chipset: RICOH
EAN: 4260113565186

**Part.no. PC0023B**

## PC Card to PCI Add-On Card, ENE Chip

PC Card to PCI Card
PCI according Local Bus Specification 2.2
and PC Card acc. Standard Release 8.0
Suitable for PC Card Type 1, 2 and 3
Compatible to 32-bit PC card 3.3V and 5V
Supports Hot Swapping
LED for operation resp. failure
Plug & Play
Chipset: ENE
EAN: 4260113564394

**Part.no. PC0023A**

## IDE to Compact Flash Adapter

IDE to CF - Compact Flash Adapter
Connector: 1x ATA IDE 40-pin Plug
OUT: CF/MD Cardslot for Compact Flash Type I, Type II, Micro-drive
CF power supply +3.3V or +5V selectable
Master or Slave mode Selection
Power supply internal 3.5“, +5 Volt
LED for operation and CF Data stream
EAN: 4260113566190

Part.no. PC0042

## ATA 133 PCI Raid Controller, 2-Port

ATA 133 PCI Raid Controller
2x Ultra ATA-133 internal
RAID 0 (Striping) and RAID 1 (Mirroring)
Maximum Speed: 133MBit/s
Maximum: 4x IDE devices
Included in delivery: 1x Ultra ATA cable
Chipset: Silicon Image
Plug & Play
EAN: 4260113566237

Part.no. PC0038A

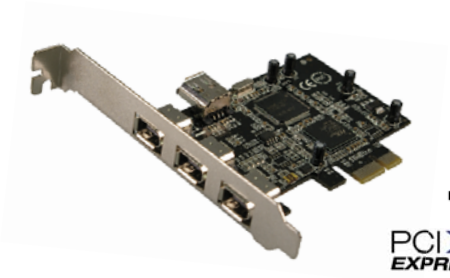

## IEEE1394a PCI Express Card, 3+1

IEEE1394a PCI Express card
3x IEEE1394a 6-pin external
1x IEEE1394a 6-pin internal
Max. Speed: 400Mbit
Internal Overvoltage protection
Plug & Play
Chipset: PLX8111 + NEC
EAN: 4260113563908

Part.no. PC0030



## PCI Express Card, 2x Serial

PCI Express card 2x Serial
2x RS232 9-pin external
Specification according 16C550 UART
Chipset: NetMOS
Max. Speed: 1 Mbyte/sec
Supports 16 Byte transmit receive
Plug & Play
EAN: 4260113563915

Part.no. PC0031

## PCI Express Card, 2x Parallel

PCI Express card 2x Parallel
2x D-SUB 25-pin external
Specification according IEEE1248
Chipset: NetMOS
Printermode: SPP, EPP, ECP
Bidirectional Support
Plug & Play
EAN: 4260113563922



**Part.no. PC0032**

## PCI Express Card, 2x Serial & 1x Parallel

PCI Express card 2x Serial + 1x Parallel
2x RS232 9-pin external
1x D-SUB 25-pin external
Specification: 16C550 UART & IEEE1248
Automatic IRQ adressing
Printermode: SPP, EPP, ECP
Bidirectional Support
Chipset: NetMOS
Plug & Play
EAN: 4260113563939



**Part.no. PC0033**

## Gigabit PCI Express Card, 10/100/1000MBit

LAN Card for the PCI Slot
IEEE802.3, 802.3u, 802.3ab, 802.3x
Speed: 10/100/1000 MBit
In Full Duplex Mode up to 20/200/2000 MBit
Automatic speed detection
Chipset: Agere Met1310
Connector: 1x RJ45
FIFO(8K/64K) buffers
LED for Link, Activity, Error
EAN: 4260113564745

**Part.no. PC0029A**

## SATA PCI Express Card, 1x SATA + 1x E-SATA

SATA PCI Express card
1x e-SATA external
1x SATA internal
Standard according Serial ATA 1.0
Max. Speed: 2.5GB/s
Independent SATA Channels
RAID 0 (Striping) and RAID 1 (Mirroring)
Supports: ATA II Port-Multiplier
EAN: 4260113560709

**Part.no. PC0002**

## SATA PCI Express Card, 2x SATA + 1x IDE

SATA PCI Express card
2x SATA internal
1x ATA IDE 40-pin internal
Standard according Serial ATA 1.0
Max. Speed: 2.5GB/s
2 independent SATA Channels
RAID 0 (Striping) and RAID 1 (Mirroring)
Output swing conrol
EAN: 4260113566169

**Part.no. PC0003A**

## USB 2.0 PC Card, 2-Port

USB 2.0 PC Card
2x USB 2.0 external
Connector: CardBus Type-2
Compatible to 32 Bit
Transfer rate: 480 Mbit/s
Built-in Overvoltage protection
Hot Plugin resp. Plug & Play
EAN: 4260113563151

**Part.no. PC0025**

## USB 2.0 PC Card, 4-Port

USB 2.0 PC Card
4x USB 2.0 external
Connector: CardBus Type-2
Compatible to 32 Bit
Transfer rate: 480 MBit/s
Built-in Overvoltage protection
Hot Plugin resp. Plug & Play
EAN: 4260113565162

**Part.no. PC0040**

## IEEE1394a PC Card, 2-Port

IEEE1394a PC Card
2x IEEE1394a 6-pin external
Connector: CardBus Type-2
Compatible to 32 Bit
Transfer rate: 400 MBit/s
Built-in Overvoltage protection
Hot Plugin resp. Plug & Play
EAN: 4260113565179

**Part.no. PC0026A**

## IEEE1394a Express Card, 2-Port

IEEE1394a Express Card
2x IEEE1394a 6-pin external
Compatible to 1-Lane (x1) PCI-Express
Transfer rate: 400 MBit/s
Chipset: Texas Instruments TI
External power supply (optional)
Hot Plugin bzw. Plug & Play
EAN: 4260113566657

**Part.no. PC0036A**

## Gigabit Express Card, 10/100/1000MBit

Gigabit Express card
IEEE 802.3,802.3ab,802.3u,802.1q
Speed: 10/100/1000 MBit
In Full Duplex Mode up up to 20/200/2000 MBit
Chipset: Agere
Connector: 1x RJ45
Express Card 34mm Standard
Compatible to 1-Lane PCI-Express
EAN: 4260113563953

**Part.no. PC0035**

## e-SATA Express Card

e-SATA Express Card
1x e-ATA external
Chipset: Silicon Image
Standard according Serial ATA 2.0
Max. Speed: 3,0 GB/s
Compatible to 1-Lane (x1)
PCI-Express Throughput
EAN: 4260113563946

**Part.no. PC0034**

www.LogiLink.com

Überreicht durch: